





链轨总成技术参数

Track Shoe Assembly&Link Assembly Specification

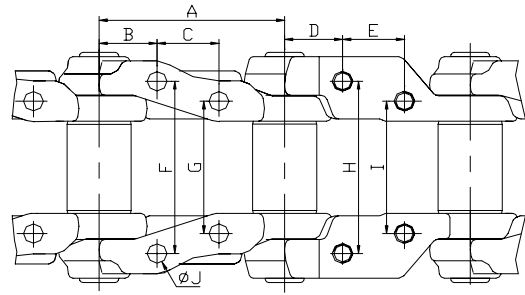

序号	型号	A	B	C	D	E	F	G	H	I	J	K	W	T	M	N	O	P	Q	R	S	U	V	L	α	结构形式	适用机型
1	T250	250	85	80			100	100			14.5	44	66	66	110	55	60	60	140	140	170				0°	主销式	
2	MT228	228.6	71.4	76.2			219.8	169			24.5	48.9	77	79	138	78	123.6	130.6	239.4	246.4	290	268	97	$\frac{560}{610}$ $\frac{760}{610}$	10°	主销式	
3	RT228	228.6	71.4	76.2	71.4	76.2	219.8	169	219.8	169	24.5	48.9	77	79	138	78	123.6	130.6	239.4	246.4	290				10°	单齿主节	
4	MT228A	228.6	71.4	76.2	71.4	76.2	219.8	169	219.8	169	24.5	48.9	77	79	138	78	123.6	130.6	239.4	246.4	290				10°	单齿主节	
5	T228B	228.6	71.4	76.2	78	50.8	201.1	169.3	210.1	179.1	22.8	50.52	75.7	77.1	138	79	127.1	127.1	243.4	254.1	294	268	97	$\frac{560}{610}$	15°	单齿主节	
6	RT228B	228.6	71.4	76.2	78	50.8	201.1	169.3	210.1	179.1	23.8	50.52	75.7	80.4	138	79	127.1	127.1	243.4	254.1	294	268	97	$\frac{560}{610}$	15°	单齿主节	
7	T228C	228.6	71.4	76.2			201.1	169.3			22.8	50.52	75.7	77.1	138	79	127.1	127.1	243.4	254.1	294				15°	主销式	
8	MW228	228.6	71.4	76.2			184	144			24.5	47	71	71	129	70	106	113	202.2	209.2	252				10°	主销式	
9	T216	216	64	76			184	146			20.5	47	71	71	123	67	105	112	202	209	250	250	86	$\frac{560}{610}$	10°	主销式	
10	MT216A	215.9	64	76.2			184.2	146.2			$\frac{192}{205}$	47.32	71	74.6	125.5	69.5	108.4	115.4	200.7	211.4	252				15°	主销式	
11	MT216B	216	63	76.2			184	146			$\frac{192}{225}$ $\frac{205}{245}$	47	71	74.3	129	70	106	113	202.2	209.2	251	252.25	86.3	$\frac{560}{610}$	10°	主销式	
12	MT216C	215.9	64	76.2	82.5	50.8	184.2	146.2	172.4	147	$\frac{192}{205}$	47.32	71	74.6	125.5	69.5	108.4	115.4	200.7	211.4	252	252.25	86.3	$\frac{560}{610}$ $\frac{660}{610}$	15°	单齿主节	
13	MT216D	215.9	64	76.2			184.2	146.2			$\frac{192}{205}$	47.32	71	71	125.5	69.5	108.4	115.4	200.7	211.4	252	252.25	86.3	$\frac{560}{610}$ $\frac{660}{610}$	15°	主销式	
14	MT216F	215.9	64	76.2	82.5	50.8	184.2	146.2	172.4	147	$\frac{192}{205}$	47.32	71	71	125.5	69.5	108.4	115.4	200.7	211.4	252	252.25	86.3	$\frac{560}{610}$ $\frac{660}{610}$	15°	单齿主节	
15	RT216A	215.9	64	76.2	82.5	50.8	184.2	146.2	172.4	147	$\frac{192}{205}$	47.32	71	74.6	125.5	69.5	108.4	115.4	200.7	211.4	252	252.25	86.3	$\frac{510}{610}$ $\frac{560}{610}$ $\frac{660}{760}$	15°	单齿主节	
16	RT216C	215.9	64	76.2	82.5	50.8	184.2	146.2	172.4	147	22.5	47.32	71	74.6	125.5	69.5	108.4	115.4	200.7	211.4	252	252.25	86.3	510	15°	单齿主节	
17	MW216	215.9	62.9	76.2			178.4	140.4			22.5	44.6	66.8	66.8	116	63.8	100.6	105.5	189.6	196.6	240				11°	主销式	
18	MW216A	215.9	64	76.2			184.1	146			$\frac{245}{225}$	47.25	71.1	71.1	129	70	102.4	108	205.7	214.2	254				12°	主销式	
19	MW216B	216	63	76.2			184	146			24.5	47	71	71	129	70	106	113	202.2	209.2	251	247	44	$\frac{510}{700}$ $\frac{600}{800}$	10°	主销式	
20	MW216C	215.9	64	76.2			184.1	146			$\frac{245}{225}$	47.25	71.1	71.1	129	70	102.4	108	205.7	214.2	254				12°	插销式	
21	MW216D	215.9	69	76			190	140			22.8	46	67.9	67.9	124	68	101.4	109.9	200.7	211.4	247	247	44	600	15°	主销式	

序号	型号	A	B	C	D	E	F	G	H	I	J	K	W	T	M	N	O	P	Q	R	S	U	V	L	α	结构形式	适用机型	
22	MW216E	215.9	62.9	76.2			178.4	140.4			22.5	44.6	66.8	66.8	116	63.8	100.6	105.5	189.6	196.6	240	247	44	$\frac{510}{700} \times \frac{600}{800}$	11°	插销式		
23	MW216F	216	63	76.2			184	146			$\frac{195}{205} \times \frac{205}{245}$	47	71	74.3	129	70	106	113	202.2	209.2	251	247	46.5	$\frac{800}{900}$	10°	主销式		
24	MW216H	216	63	76.2			184	146			24.5	47	71	74.3	129	70	106	113	202.2	209.2	251	247	44	$\frac{510}{700} \times \frac{600}{800}$	10°	插销式		
25	MT203.2C	203.2	58	72.2			178.4	138.4			$\frac{195}{205}$	44.35	66.5	69.8	116.4	64	99.6	106.7	188.6	195.6	236.6	238	74	$\frac{510}{560} \times \frac{610}{610}$	10°	主销式		
26	MT203.2D	203.2	58	72.2			178.4	138.4			$\frac{195}{205}$	44.35	66.5	66.5	116.4	64	99.6	106.7	188.6	195.6	236.6	238	74	$\frac{510}{560} \times \frac{610}{610}$	10°	主销式		
27	W203.2	203.2	58	72.2			178.4	138.4			$\frac{205}{225}$	44.19	66.65	66.65	116.4	64	100.8	107.9	189	200.8	245				15°	插销式		
28	W203.2A	203.2	58	72.2			178.4	138.4			19.5	44.35	66.5	66.5	116.4	64	100.8	107.9	189	200.8	242					15°	主销式	
29	W203.2B	203.2	58	72.2			178.4	138.4			$\frac{205}{225}$	44.19	66.65	66.65	116.4	64	100.8	107.9	189	200.8	245	236	41	$\frac{600}{700} \times \frac{800}{800}$	15°	主销式		
30	MW203.2	203.2	58	72.2			178.4	138.4			$\frac{205}{225}$	44.5	66.65	66.65	116.4	64	100.8	107.9	189	200.8	242	236	41	$\frac{600}{700} \times \frac{800}{800}$	15°	主销式		
31	MW203.2A	203.2	58	72.2			178.4	138.4			$\frac{195}{205}$	44.35	66.5	66.5	116.4	64	100.8	107.9	189	200.8	239.6					15°	主销式	
32	MW203.2B	203.2	62.1	72			179	129			20.9	41.9	63.9	63.9	115	63.8	93	104.7	182.3	193	230	236	41	$\frac{600}{700} \times \frac{800}{800}$	15°	主销式		
33	RD60	203.2	58	72.2	58	72.2	178.4	138.4	178.4	138.4	19.5	44.5	66.5	69.8	116.4	64	100.8	107.9	189	200.8	245	238	74	$\frac{510}{560} \times \frac{610}{610}$	15°	多齿主节		
34	T203	203	60	72			184	146			20.5	45	66	66	115	63	108	115	201	208	250	238	74	500		10°	主销式	
35	T203A	203	62	70			197	157			20.5	44.5	65	70	123	71	113	113	213	221	274	238	74	500		11.3°	主销式	
36	MT203	203	60	72			184	146			20.5	45	66	66	115	63	108	115	201	208	250	238	74	500		10°	主销式	
37	T(203)05H	203	58	76			184	146			20.5	45	66	66	115	63	108	115	201	208	250	238	74	500		10°	主销式	
38	MT(203)05H	203	58	76			184	146			20.5	45	66	66	115	63	108	115	201	208	250					10°	主销式	
39	TH100	203	53.5	80			168	152			16.5	44.5	65	65	121	63	113	113	197	205	255	238	74	500		11°	主销式	
40	MT202.8	202.8	58	76.2			171.4	133.3			19.38	44.5	66.5	66.5	121.5	69.1	102.5	102.5	183.5	192.7	230					13°	主销式	
41	MT202.8A	202.8	58	76.2	77.9	44.4	171.4	133.3	158.7	134.85	19.38	44.5	66.5	66.5	121.5	69.1	102.5	102.5	183.5	192.7	230	238	74	$\frac{510}{560} \times \frac{610}{610}$	13°	多齿主节		
42	MT202.8B	202.8	58	76.2			171.4	133.3			19.38	44.5	66.5	69.8	121.5	69.1	102.5	102.5	183.5	192.7	230	238	74	$\frac{510}{560}$	13°	主销式		
43	MT202.8C	202.8	64	68			185.3	137.3			20.5	44.6	69.8	72.8	125	72	102.3	102.3	181.8	191.3	231					14°	插销式	
44	MT202.8D	202.8	58	76.2			155	116.9			19.38	44.5	66.5	66.5	121.5	69.1	86.1	86.1	167.1	176.3	213.6					13°	主销式	
45	RT202.8	202.8	58	76.2	77.9	44.4	171.4	133.3	158.7	134.85	19.5	44.5	66.5	69.8	128	75.6	102.5	102.5	183.3	192.5	230					14°	多齿主节	
46	RT202.8C	202.8	64	68	64	68	185.3	137.3	185.3	137.3	20.5	44.6	69.8	72.8	125	72	102.3	102.3	181.8	191.3	231					14°	单齿主节	
47	RT202.8D	202.8	58	76.2	77.9	44.4	171.4	133.3	158.7	134.85	19.5	44.5	66.5	72.8	128	75.6	102.5	102.5	183.3	192.5	230					14°	多齿主节	
48	D6D	202.8	58	76.2	77.9	44.4	171.4	133.3	158.7	134.85	19.38	44.5	66.5	69.8	121.5	69.1	102.5	102.5	183.5	192.7	230	238	74	$\frac{510}{560} \times \frac{610}{610}$	13°	多齿主节		
49	MW202.8	202.8	58	72			178	138			19.5	44.5	66.65	66.65	116.4	64	100.4	107.4	188.6	200.4	242					15°	主销式	
50	D7-47G	202.8	57.6	76.2			184.15	146.05			$\frac{195}{205}$	44.5	66.5	66.5	117.3	65	106.05	106.05	195.3	206.05	250	240	42	600		15°	主销式	
51	W190	190	58	62			160.4	124.4			$\frac{195}{205}$	38	59	59	105	58	83.2	90.3	167.6	174.6	213.2	219	36	$\frac{500}{700} \times \frac{600}{800}$	10°	主销式		

序号	型号	A	B	C	D	E	F	G	H	I	J	K	W	T	M	N	O	P	Q	R	S	U	V	L	α	结构形式	适用机型	
52	MW190	190	58	62			160.4	124.4			$\frac{185}{205}$	38	59	59	105	58	83.2	90.3	167.6	174.6	213.2	219	36	$\frac{500}{700} \frac{600}{800}$	10°	主销式		
53	W190A	190	58	69			155.6	119.6			20.7	36.5	58.45	58.45	106	60	82.9	90	168.9	175.9	208	217.5	36	$\frac{600}{800}$	10°	主销式		
54	W190B	190	58	69			155.6	119.6			20.7	36.5	58.45	58.45	106	60	82.9	90	168.9	175.9	208	217.5	36		10°	主销式		
55	MW190C	190	58	62			160.4	124.4			$\frac{185}{205}$	38.2	59.5	59.5	105	58	83.2	90.3	167.6	174.6	213.2	219	36	$\frac{500}{700} \frac{600}{800}$	10°	主销式		
56	MW190D	190	58	62			160.4	124.4			$\frac{185}{205}$	38	59	59	105	58	83.2	90.3	167.6	174.6	213.2	219	36	$\frac{500}{700} \frac{600}{800}$	10°	插销式		
57	W178	177.8	56.35	65.1			120.6	114.3			17	39.5	58.6	58.6	103.2	57.2	72.3	79.3	156.7	162.3	204				8°	主销式		
58	W178A	177.8	56.35	65.1			132.5	126.2			18.5	39.5	58.6	58.6	103.2	57.2	84.2	91.2	168.6	174.2	216				8°	主销式		
59	MT175.4	175.4	57.7	58.7			144.8	125.2			16.5	36.3	58.8	58.8	103.2	59	83	89	166.7	173	213					10°	主销式	
60	MT175.4A	175.4	57.1	58.7	64.4	44.4	144.4	125.4	148.4	120.6	16.2	36.6	58.8	62	109	66	90.8	90.8	166	175.6	207					15°	多齿主节	
61	RT175.4	175.4	57.1	58.7	64.4	44.4	144.4	125.4	148.4	120.6	16.2	36.6	58.8	62	109	66	90.8	90.8	166	175.6	207					15°	多齿主节	
62	W175.4	175.4	57.7	58.7			144.8	125.2			18.5	36.6	58.8	58.8	103.2	59	83	89	166.7	173	213					10°	主销式	
63	MW175.4	175.4	57.7	58.7			144.8	125.2			$\frac{165}{185}$	36.3	58.8	58.8	103.2	59	83	89	166.7	173	213	198.9	34.5	500	10°	主销式		
64	MW175.4A	175.4	57.7	58.7			144.8	125.2			$\frac{165}{185}$	36.3	58.8	58.8	103.2	59	83	89	166.7	173	213					10°	插销式	
65	MT175	175	54	57			158.4	122.4			16.5	38	55	58.5	101.5	56.5	87.6	95.4	169.9	176.2	221	199.6	62	$\frac{400}{405} \frac{460}{460}$	10°	主销式		
66	MW175	175	53.8	57			102.4	86.4			16.5	30	46.1	46.1	86	47	51.4	57.4	116.1	121.4	170	198.9	34.5	500	10°	主销式		
67	MW175A	175	53.8	57			102.4	86.4			16.5	30	46.1	46.1	86	47	51.4	57.4	116.1	121.4	170	198.9	34.5	500	10°	插销式		
68	MT171.45	171.45	55.562	60.325			107.95	107.95			14.8	33.5	53.6	53.6	95	51.8	73	75.4	137.5	145	179.5	199.6	62	600	15°	主销式		
69	MT171.45A	171.45	55.562	60.325	66.7	38.1	107.95	107.95	109.97	104.77	16.2	33.5	53.6	53.6	95	51.8	73	75.4	137.5	145	179.5					15°	多齿主节	
70	RT171.5	171.45	55.6	60.3	66.7	38.1	107.95	107.95	109.97	104.77	16.2	33.2	53.6	53.6	95	51.8	73	75.4	137.5	145	180					15°	多齿主节	
71	RT171.5A	171.45	55.6	60.3	66.7	38.1	107.95	107.95	109.97	104.77	16.2	33.2	53.7	57	100.8	57.6	73	73	138.4	147	183.5					15°	多齿主节	
72	MW171.45	171.45	55.562	60.325			107.95	107.95			$\frac{148}{162}$	33.5	53.6	53.6	95	51.8	73	75.4	137.5	145	179.5	188	26.5	$\frac{500}{600}$	15°	主销式		
73	MW171.45A	171.45	55.562	60.325			107.95	107.95			$\frac{148}{162}$	33.5	50.6	50.6	95	51.8	73	75.4	137.5	145	179.5	188	26.5	$\frac{500}{600}$	15°	主销式		
74	MW171.45B	171.45	55.562	60.325			107.95	107.95			$\frac{148}{162}$	33.5	53.6	53.6	95	51.8	73	75.4	137.5	145	179.5	198.9	34.5	$\frac{500}{600}$	15°	插销式		
75	W171.45C	171.45	55.56	60.3			107.95	107.95			16.2	36	53.5	53.5	96.5	53.5	64.2	64.2	136.8	146.8	183.5	198.9	34.5	$\frac{500}{600}$	15°	插销式		
76	MT171	171	57.5	58.9			144.5	125.4			16.5	36.5	54	54	102	58.5	86.2	93.3	165.2	172.2	210	199.6	62	$\frac{450}{500}$	10°	主销式		
77	MT171A	171	57.5	58.9			144.5	125.4			18.5	36.5	54	54	102	58.5	86.2	93.3	165.2	172.2	210				10°	主销式		
78	MW171	171	57.5	58.9			144.5	125.4			16.5	36.5	54	54	102	58.5	86.2	93.3	165.2	172.2	210				10°	主销式		
79	MW171A	171	55.6	60.3			107.95	107.95			16.2	29.9	47.1	47.1	90.2	49.1	60	64.2	122.1	128	170				11°	主销式		
80	T160	160	52	56			99	99			14.5	29.8	44.8	44.8	83	46	65	65	132.3	139	155					10°	主销式	
81	T160A	160	52	56			99	99			14.8	29.7	44.7	44.7	85	47	62	62	128	132	159				6°	插销式		

序号	型号	A	B	C	D	E	F	G	H	I	J	K	W	T	M	N	O	P	Q	R	S	U	V	L	α	结构形式	适用机型
82	MT160	160	52	56			99	99			14.5	29.8	44.8	44.8	83	46	65	65	132.3	139	155				10°	主销式	
83	MT160A	160	52	56			99	99			14.8	29.7	44.7	44.7	85	47	62	62	128	132	159				6°	插销式	
84	MT159.77	159.77	48.8	54			117.6	98.55			13	35	54	54	88.9	46.15	62.55	62.55	130.65	136.55	155				15°	主销式	
85	MT159.8	159.77	48.8	54			117.6	98.55			14.5	32	51.1	54	90	49	62.55	62.55	127.4	136.55	161				15°	主销式	
86	RT159.77	159.77	48.8	54			117.6	98.55			14.5	35	54	54	88.9	46.15	62.55	62.55	130.65	136.55	155				15°	插销式	
87	RT159.8	159.77	48.8	54	48.8	54	117.6	98.55	117.6	98.55	14.5	32	51.1	54	90	49	62.55	62.55	127.4	136.55	161				15°	多齿主节	
88	RT159.8A	159.77	48.8	54	48.8	54	117.6	98.55	117.6	98.55	14.5	32	51.1	51.1	90	49	62.55	62.55	127.4	136.55	161				15°	多齿主节	
89	RT159.8B	159.77	48.8	54			117.6	98.55			14.5	32	51.1	54	90	49	62.55	62.55	127.4	136.55	161				15°	主销式	
90	T155.6	155.6	49.21	57.15			88.9	88.9			12.3	28.9	43.22	43.22	76.2	41.3	59.4	59.4	118.4	125.4	157				20°	主销式	
91	MT155.6A	155.6	48.5	54.8			104.8	88.9			14.8	28.3	46.8	46.8	84	47	59.9	59.9	119.9	127.9	159				15°	主销式	
92	MT154	154	44	57			112.4	82.4			14.5	30	46.1	46.1	87	47	49.4	58	114.8	123.4	170				15°	主销式	
93	MW154	154	44	57			112.4	82.4			14.5	30	46.1	46.1	87	47	49.4	58	114.8	123.4	170	166	26	450	15°	主销式	
94	MW154A	154	47.5	55			90	90			14.3	30	46	46	80	42	55.4	61.6	118.6	124.8	155	166	26	450	11°	主销式	
95	MW154B	154	47.5	55			90	90			14.3	30	46	46	80	42	55.4	61.6	118.6	124.8	155				11°	插销式	
96	MW154C	154	44	57			112.4	82.4			14.5	30	46.1	46.1	87	47	49.4	58	114.8	123.4	170				15°	插销式	
97	T149	149	46	57			84.2	84.2			12.5	25	38	38	76.2	41	52.4	56.6	104.3	114	132				18°	主销式	
98	MW146	146	44	56			130	102			15	30	46	46	83	43	65	65	142	142	174				0°	主销式	
99	T143	143	41.5	57			120	92			13	32	46	46	79	41	62	62	117.7	122	150				10°	主销式	
100	T140	140	44	52			86	86			12.3	24.9	36.8	36.8	70	38	59	59	109	113.6	136				10°	主销式	
101	MT140B	140	44	52			86	86			12.3	24.9	36.8	36.8	70	38	59	59	109	113.6	136	154	20	450	10°	插销式	
102	W140	140	44	52			86	86			12.3	24.9	36.8	36.8	70	38	59	59	109	113.6	136	154	20	450	10°	主销式	
103	MW140	140	44	52			94	94			12.3	26.7	41.7	41.7	78	42	62.6	62.6	118.6	123.8	146				10°	主销式	
104	W140B	140	44	52			86	86			12.3	24.9	36.8	36.8	70	38	59	59	109	113.6	136				10°	插销式	
105	MT135	135	42.4	43.4			99	72			12.5	24	41.4	41.4	75	40.5	46.8	49.1	100.4	106.8	142				12°	主销式	
106	MT135A	135	42.4	43.4			99	72			12.5	24	41.4	41.4	75	40.5	46.8	49.1	100.4	106.8	142				12°	插销式	
107	W135A	135	41	46			88.4	64.4			12.5	22	35.2	35.2	65	35	40.4	40.4	88.4	88.4	123.4	154	20	400	0°	插销式	
108	W135B	135	41	46			94	64			13.2	21.9	34.8	34.8	65	35.5	40	44.4	82.6	87	123				9°	插销式	
109	W135C	135	41	46			98.4	74.4			12.5	22	35.2	35.2	65	35	50.4	50.4	98.4	98.4	133.4	154	20	400	0°	插销式	
110	MW135	135	42.4	43.4			99	72			12.5	24	41.4	41.4	75	40.5	46.8	49.1	100.4	106.8	142	154	20	250 400	12°	主销式	
111	MW135A	135	42.4	43.4			99	72			12.5	24	41.4	41.4	75	40.5	46.8	49.1	100.4	106.8	142	154	20	250 400	12°	插销式	

